

HIGH EFFICIENCY PLUG FANS



MODEL: CPG



Overview

High Efficiency Plug Fans



Model CPG,
Arrangement 9

Plug fans offer great versatility for complex system configurations. Equipped with a gusseted mounting panel, they are mounted directly to the plenum wall separating the motor and drive components from the process air. Plug fans provide high efficiency recirculation air with the benefit of easy installation and removal.

Typical Applications Include

Air Curtains, Dyers, Freezers, High Temperature, Kilns, Ovens, Process Applications, Product Cooling, Re-Circulation, Air Heaters, Ceiling, Wall and Floor Panel Plenums, Degreasers, Dryers, Dust Collectors, Evaporators, Packaged Air Handlers, Parts Washers, Penthouses, Smoke Houses, Space Heaters, Spray Booths and other High Temperature Applications

Impeller Types

Backward Curved

Arrangements

Available in Arrangement 1P, 9 and 9P (Belt Driven) and Arrangement 4, 4P and 8P (Direct Drive) configurations

Optional Construction


High-Temperature Construction to 1000° F, Insulated Plug, Pedestal Design for Floor Mounting, Spark Resistant Construction, Special Materials, All Welded Housing, Variable Inlet Vanes, Integral Inlet Cone Assembly, Shallow Depth Inlet Cone, Special Impeller Width and Diameter

Certifications

ATEX Construction

Sizes and Performance

12" to 49" impeller diameters (305 mm to 1,245 mm)
Airflow to 76,000 CFM (129,100 m³/hour)
Static pressure to 12" w.g. (2,980 Pa)

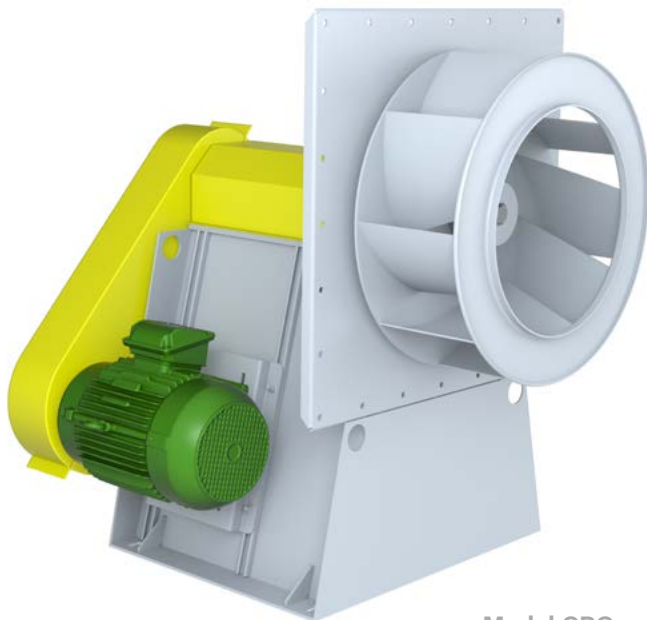

Model CPG,
Arrangement 9P

AEROVENT 
INDUSTRIAL VENTILATION SYSTEMS



For complete product performance, drawings and available accessories, download our Fan Selector software at aerovent.com.

Overview

Model CPG

Model CPG plug fans from Aerovent are compact, versatile and offer the highest efficiency in the industry. Their versatility allows them to be used for air circulation in a variety of commercial and industrial applications including air curtains, air heaters, ceiling, wall and floor panel plenums, degreasers, dryers, dust collectors, evaporators, freezers, kilns, ovens, packaged air handlers, parts washers, penthouses, smoke houses, space heaters, spray booths and other high temperature applications.


Plug fans are housed in the customer's enclosure in applications where the system plenum acts as the fan housing. This configuration saves space since connecting ductwork and motor support pedestals are generally not needed. More space savings can be obtained by utilizing the impeller compartment as a pressurized chamber in lieu of a fan scroll. The use of multiple discharges from the pressurized chamber allows for additional savings by reducing ducting requirements.

CPG plug fans feature SWSI backward curved, non-overloading, single thickness airfoil type impellers. The unique impeller offers increased efficiency over competitor's airfoil blade designs yet can handle airstreams not conducive to traditional hollow airfoil shapes.

The plug fan's motor and drive are protected from high temperatures by the customer's chamber wall or the optional 4" or 6" insulated plug. The motor and drive are mounted to the plug panel, which may be bolted or welded in place. The plug assembly may be mounted with the shaft in either the vertical or horizontal position for maximum flexibility. Horizontal construction is standard. Vertical mounting can be provided when specified. An all welded housing and an integral inlet cone are available as options.




Paint Booth Ventilation

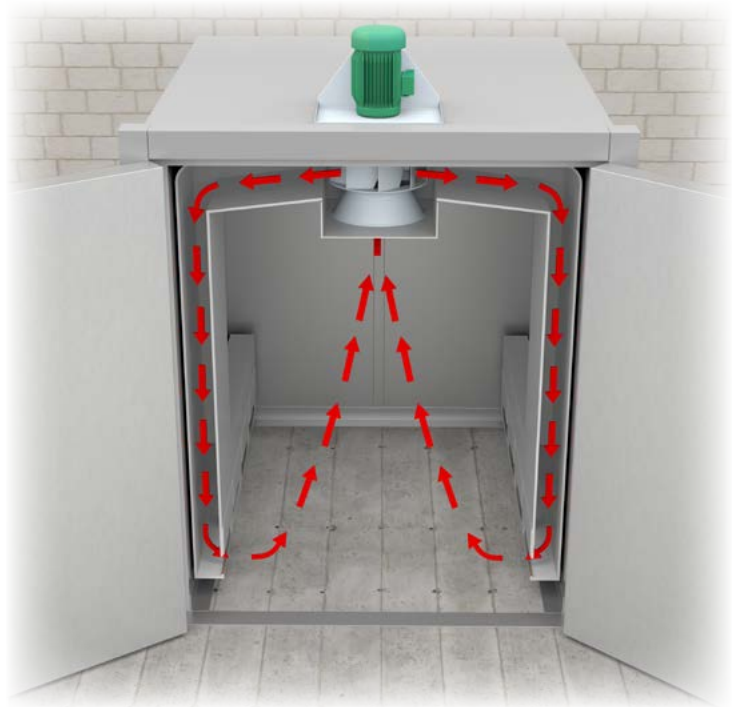

Oven Airflow

Energy Regulations

Aerovent supports energy efficiency regulations enacted by the U.S. Department of Energy (DOE) and specific states. The selection and application of fan products is a significant part of these regulations. Engineers and specifiers must understand how to apply Aerovent products to their specific applications to meet applicable DOE and state regulatory requirements. Aerovent has made significant investments in product testing and development to provide efficient products. Developments in Aerovent's Fan Selector software are in place to aid your decision in product selection to assist with meeting the efficiency requirements as stipulated in the applicable regulations.

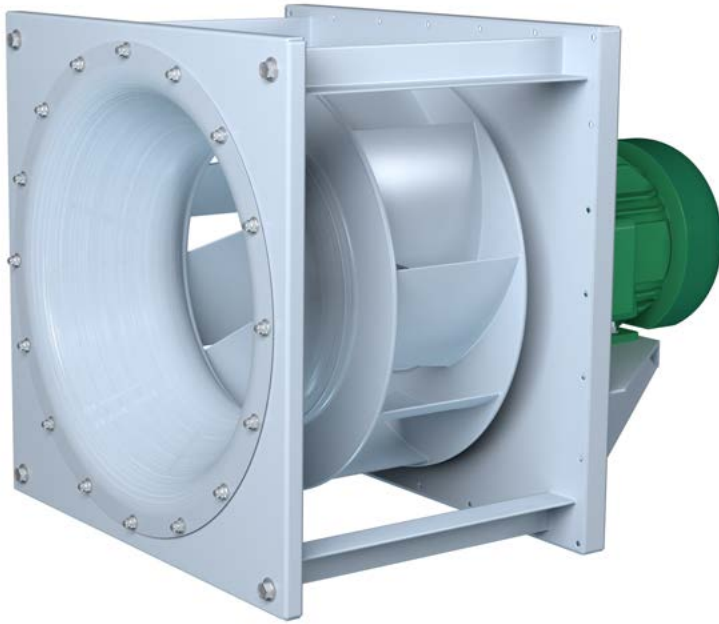

Non-Insulated,
Arrangement 4 CPG

Plug Panel

Constructed of steel with formed flanges to maintain flatness and rigidity. Panel is prepunched for bolt mounting. Panel assembly may also be welded in place. The "cross frame" bearing support is designed for maximum stability and load spreading. Bearings are serviceable without disassembly of panel or frame.

Plug Assembly

Available for both horizontal and vertical applications. Horizontal construction is standard. Vertical construction will be provided when specified.

Adjustable Motor Base

The motor base is standard in Arrangement 9 with leveling and tension adjustment to ensure proper drive belt alignment. The motor base is heavy-gauge steel and prepunched to accept the standard motor frame specified.

Impellers

Impellers are assembled of formed blades welded to both back plate and rim. Impellers are statically and dynamically balanced.

Inlet Cones

Heavy-gauge and spun to match the impeller intake rim to ensure smooth airflow. Inlet cone flange is prepunched for mounting. Inlet cones are shipped loose as standard. An integral inlet cone is optional.

Shafts

Standard shaft diameters are sized for plug thicknesses to 6 inches and 1000°F operation.

Bearings

Either ball or spherical roller, heavy-duty, self-aligning, pillow block type bearings are provided. Bearing selection is based on L-10 minimum life of 40,000 hours or average life of 200,000 hours. Split roller bearings are not recommended.

High Temperature Construction

- 301-500°F: Includes high temperature grease, expansion and non-expansion bearings, shaft seal and shaft cooler.
- 501-800°F: Includes the modifications above with the addition of high temperature aluminum paint. Minimum 4" insulation is required and is available as an optional item from Aerovent. Be sure to apply derating factors for high temperature construction. See Table 8 on page 11.
- 801-1000°F: Includes the modifications above with the addition of 316 stainless steel impeller and shaft. Also includes shaft extension for the required 6" insulation. 6" insulated plug is available as an optional item. Be sure to apply stainless steel derating factors for temperature. See Table 7 on page 11.

Insulated Plug

Protects motor and drive components from heat. An insulated plug is recommended for temperatures above 300°F. Available in 2", 4" and 6" thicknesses. Special thicknesses to match customer's insulated wall are available. Plug is assembled to mounting panel when ordered. See Table 1 on page 10 for maximum RPMs.

Spark Resistant Construction

Fan applications may involve the handling of potentially explosive or flammable particles, fumes or vapors. Such applications require careful consideration by the system designer to ensure the safe handling of such gases. Aerovent offers the following classifications of spark resistant construction per AMCA Standard 99. It is the specifier or the user's responsibility to specify the type of spark resistant construction with full recognition of the potential hazards and the degree of protection required.

Type C - The fan shall be so constructed that a shift of the impeller or shaft will not permit two ferrous parts of the fan to rub or strike.

All Welded Housing

Heavy-gauge steel housing is provided with impeller opening on each side and weld studs on the inlet side for cone mounting. Specify rotation and discharge as viewed from drive side to ensure proper stud placement. Housing supports and attachments for wall mounting to be provided by others. See page 13 for dimensions.



High Temperature,
Arrangement 9 CPG

Variable Inlet Vanes

Vane blades are cantilever design or center supported, equipped with permanently lubricated bearings and ball joints for smooth and easy operation. Vane assemblies are external type for sizes 121 through 161 and nested for sizes 181 through 491. Standard inlet vanes are applicable to 300°F. Consult factory for higher temperatures.

Integral Inlet Cone Assembly

Includes four pieces of angle, welded to the insulated plug or mounting panel, which serve to pre-align the inlet funnel within the impeller. The entire unit can be installed or removed through the same hole in the customer's enclosure, without the need for additional mounting or alignment of the inlet cone.

Shallow Depth Inlet Cone

The shallow inlet cone can shorten the overall length of the plug fan, providing extra space where needed. See dimensional data on page 13 for comparison between standard inlet cone and the shallow depth cone. Fan performance in smaller sizes must be derated for the modification. See Table 7 on page 11 for performance derates.

Arrangement 1P

Belt driven arrangement where the fan is mounted to grade and the motor is mounted separate from the fan. Typically used on larger fans and/or larger HP motors where the customer's wall may not be sufficient by itself. Mounting to the foundation also makes it better for meeting lower vibration requirements. Mounting panel is optional on arrangement 1P.



Arrangement 4

Direct drive arrangement where the impeller is mounted to the motor shaft. The design is more compact and requires less maintenance due to not having fan shaft, bearings or belts. High airstream temperatures may limit the use of this arrangement.




Arrangement 4P

Same as the arrangement 4 fan except the fan is mounted to grade. Typically used where the customer's wall may not be sufficient by itself. Mounting to the foundation also makes it better for meeting lower vibration requirements. Mounting panel is optional.



Arrangement 8P

Direct drive arrangement where the motor shaft is coupled to the fan shaft. The entire assembly is mounted to grade. Typically used on larger fans and/or larger HP motors where the customer's wall may not be sufficient by itself. Mounting to the foundation also makes it better for meeting lower vibration requirements. Mounting panel is optional.

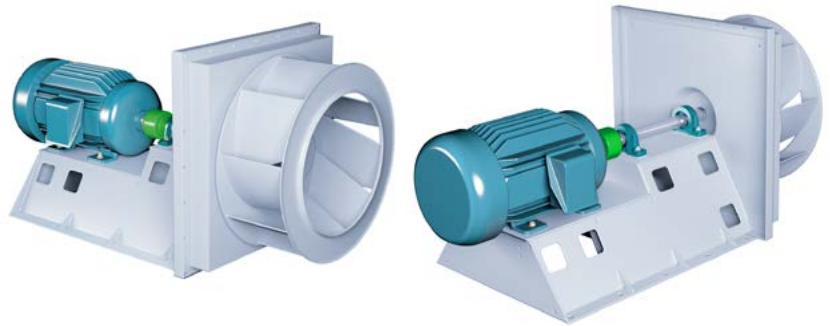


Arrangement 9


Arrangement 9 is the most common plug fan arrangement. It is fully supported by the customer's wall. Plug fans are housed in the customer's enclosure in applications where the system plenum acts as the fan housing. Unlike the plenum fan, motor, shaft and bearings are outside of the process airstream.



Arrangement 9P

Same as the arrangement 9 fan except the fan is mounted to grade. Typically used on larger fans and/or larger HP motors where the customer's wall may not be sufficient by itself. Mounting to the foundation also makes it better for meeting lower vibration requirements. Mounting panel is optional.

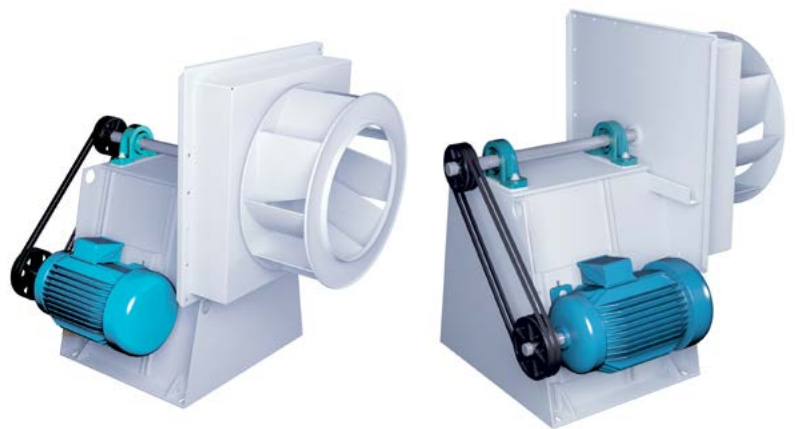

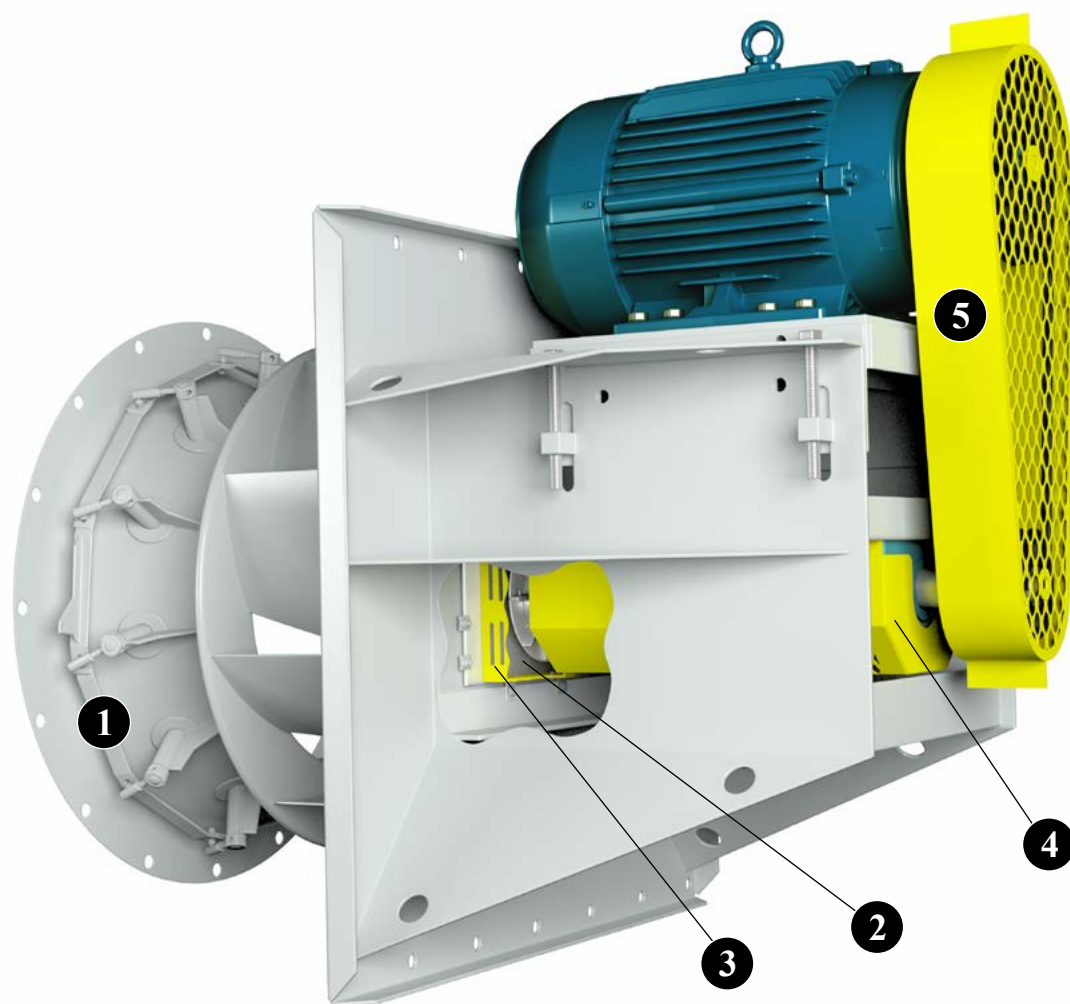

1 Inlet Vanes For reduced flow situations with relatively clean air, inlet vane type dampers are available to maintain fan efficiency. The inlet vanes are external type attached to the inlet of the fan. Standard construction inlet vanes are suitable in applications up to 300°F. High temperature inlet vanes are also available for temperatures up to 600°F.

2 Shaft Coolers Cast aluminum shaft cooler dissipates the heat transferred to the shaft from the airstream protecting the fan bearings. Recommended for applications over 300°F.

3 Shaft Seals reduce leakage and protect the bearings from a contaminated airstream. Standard seals are constructed of Tetraglas compressed between an aluminum cover plate and the fan housing. The standard shaft seal is not gas tight. Special seals are available for low leakage applications requiring more protection.

4 Shaft and Bearing Guards Sheet metal guards cover shaft and bearings and come with extended lube lines to a common point outside of the guard. A guard spanning the shaft between the bearings is available to provide open access to bearings for lubrication and vibration monitoring.

5 Belt Guards Belt guard protects personnel from the moving drive parts. OSHA and quick access guards are available.

Other Accessories Include:

- Piezometer Ring
- Inlet Screens
- Special Impeller Widths

Mounting is accomplished by providing a hole larger than the impeller diameter through the chamber wall. The impeller, shaft, motor and drive assembly is then positioned to the inlet cone (mounted in opposite wall) and secured in place. See Figure A.

Another method is to provide a hole sized only for the impeller drive shaft. The impeller is then positioned through the opening for the inlet cone after the drive and panel assembly has been securely mounted. See Figure B.

Plug fans may be applied with open impeller (unhoused) or with a housing as shown in Figure C. Performance data in this catalog is for unhoused impeller application.

Walls must be designed by the users to support the dynamic loads of the fan without resonance to eliminate vibration and bearing failure.

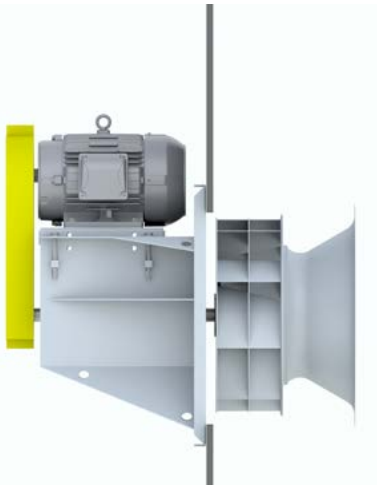


Figure A



Figure B



Figure C
(shown with optional housing)

Mounting Arrangements



Horizontal



Vertical Down



Vertical Up

To ensure proper motor selection, consideration must be given to starting torque requirements (fan impeller inertia WR^2) along with the operating BHP. Table 1 lists the WR^2 factors for different impeller sizes to be used in evaluating

the capability of a selected motor. In some cases it may be necessary to provide a larger horsepower motor, even though it may not be dictated by the operating BHP, to bring the fan to speed.

Table 1. Maximum Fan RPMs, Impeller Weights and WR^2

| FAN SIZE | CLASS II | | | | | CLASS III | | | | |
|----------|-------------|---------|---------|--------------------|-------------------------------|-------------|---------|---------|--------------------|-------------------------------|
| | MAXIMUM RPM | | | IMPELLER WT. (LBS) | WR^2 (LBS-FT ²) | MAXIMUM RPM | | | IMPELLER WT. (LBS) | WR^2 (LBS-FT ²) |
| | NO PLUG | 4" PLUG | 6" PLUG | | | NO PLUG | 4" PLUG | 6" PLUG | | |
| 121 | 3778 | 3000 | 3000 | 21 | 3 | - | - | - | - | - |
| 141 | 3352 | 3000 | 2875 | 24 | 4 | - | - | - | - | - |
| 161 | 2975 | 2975 | 2425 | 32 | 7 | - | - | - | - | - |
| 181 | 2644 | 2644 | 2275 | 52 | 13 | 3557 | 3000 | 3000 | 62 | 14 |
| 201 | 2380 | 2380 | 2200 | 58 | 18 | 3202 | 3000 | 2900 | 70 | 20 |
| 221 | 2125 | 2125 | 1850 | 75 | 31 | 2859 | 2859 | 2650 | 84 | 33 |
| 251 | 1889 | 1889 | 1700 | 96 | 50 | 2541 | 2541 | 2303 | 111 | 51 |
| 281 | 1676 | 1676 | 1676 | 140 | 94 | 2255 | 2255 | 1936 | 156 | 104 |
| 321 | 1487 | 1487 | 1487 | 173 | 152 | 2001 | 2001 | 1729 | 195 | 167 |
| 351 | 1322 | 1322 | 1322 | 211 | 241 | 1779 | 1779 | 1483 | 236 | 266 |
| 391 | 1190 | 1190 | 1190 | 254 | 376 | 1601 | 1601 | 1578 | 283 | 413 |
| 441 | 1062 | 1062 | 1062 | 361 | 613 | 1429 | 1429 | 1429 | 482 | 880 |
| 491 | 952 | 952 | 952 | 465 | 1025 | 1281 | 1281 | 1281 | 613 | 1450 |

Table 2. Bare Fan and Accessory Weights

| FAN SIZE | APPROXIMATE WEIGHTS (LBS.) | | | | |
|----------|----------------------------|-----------|----------------|---------|-------------|
| | BARE FAN | | INSULATED PLUG | HOUSING | INLET VANES |
| | CLASS II | CLASS III | | | |
| 121 | 140 | - | 25 | 24 | 45 |
| 141 | 145 | - | 25 | 30 | 52 |
| 161 | 185 | - | 32 | 44 | 58 |
| 181 | 208 | 444 | 32 | 65 | 29 |
| 201 | 221 | 470 | 32 | 79 | 33 |
| 221 | 235 | 513 | 35 | 97 | 38 |
| 251 | 240 | 594 | 35 | 117 | 40 |
| 281 | 323 | 756 | 40 | 143 | 45 |
| 321 | 388 | 990 | 55 | 287 | 50 |
| 351 | 430 | 1118 | 55 | 350 | 50 |
| 391 | 575 | 1467 | 75 | 428 | 55 |
| 441 | 639 | 1745 | 75 | 522 | 60 |
| 491 | 950 | 1900 | 95 | 634 | 65 |

Table 3. Shallow Inlet Cone Derates

| FAN SIZE | INCREASE DESIGN SPEED BY | INCREASE DESIGN BHP BY |
|-----------|--------------------------|------------------------|
| 121 - 141 | Not Available | Not Available |
| 161 - 201 | 2% | 4% |
| 221 - 491 | 0% | 0% |

NOTE: Maximum RPMs in Table 1 cannot be exceeded.

Table 4. High Temperature Applications

| TEMP. RANGE | BEARING TYPE | LUBRICATION | OTHER REQUIREMENTS |
|---------------|-----------------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TO 300°F | BALL OR ROLLER | GREASE | STANDARD CONSTRUCTION |
| 301 TO 500°F | EXPANSION AND NON-EXPANSION | HIGH TEMPERATURE GREASE | CERAMIC SHAFT SEAL, SHAFT COOLER |
| 501 TO 800°F | EXPANSION AND NON-EXPANSION | HIGH TEMPERATURE GREASE | HIGH TEMPERATURE ALUMINUM PAINT 4" MINIMUM INSULATION REQUIRED BY AEROVENT OR CUSTOMER CERAMIC SHAFT SEAL, SHAFT COOLER |
| 801 TO 1000°F | EXPANSION AND NON-EXPANSION | HIGH TEMPERATURE GREASE | 316 STAINLESS STEEL IMPELLER AND SHAFT 6" MINIMUM INSULATION REQUIRED BY AEROVENT OR CUSTOMER HIGH TEMPERATURE ALUMINUM PAINT CERAMIC SHAFT SEAL, SHAFT COOLER |

Figure 1. Impeller and Plenum Arrangement

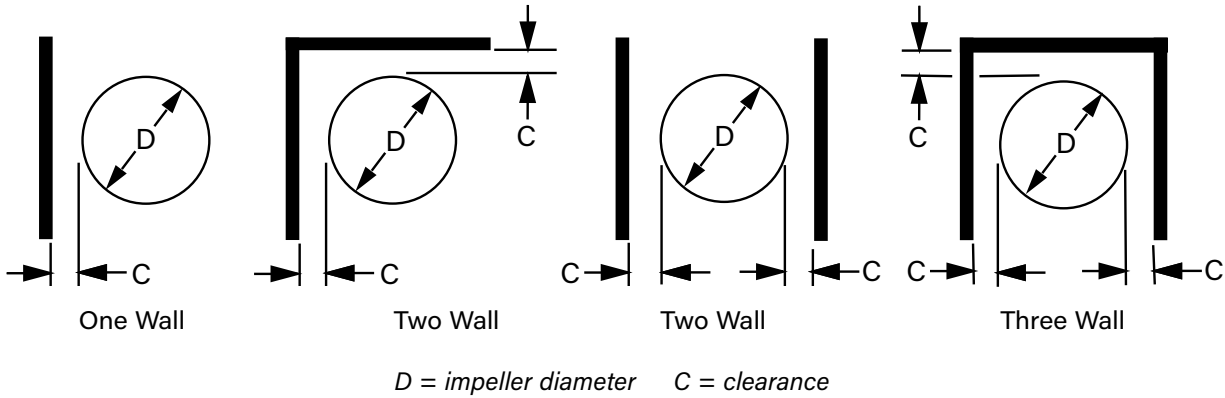


Table 5. Wall Proximity Factors

| % WOV | FACTOR | C = D/8 | | | C = D/4 | | | C = D/2 | | |
|-------|--------|----------|----------|------------|----------|----------|------------|----------|----------|------------|
| | | ONE WALL | TWO WALL | THREE WALL | ONE WALL | TWO WALL | THREE WALL | ONE WALL | TWO WALL | THREE WALL |
| 95 | RPM | 1.02 | 1.03 | 1.09 | 1.01 | 1.02 | 1.06 | 1.01 | 1.01 | 1.03 |
| | BHP | 1.06 | 1.08 | 1.29 | 1.04 | 1.06 | 1.20 | 1.02 | 1.02 | 1.08 |
| 85 | RPM | 1.02 | 1.02 | 1.08 | 1.01 | 1.02 | 1.06 | 1.01 | 1.01 | 1.03 |
| | BHP | 1.05 | 1.07 | 1.26 | 1.03 | 1.05 | 1.18 | 1.02 | 1.02 | 1.08 |
| 75 | RPM | 1.01 | 1.02 | 1.07 | 1.01 | 1.02 | 1.05 | 1.00 | 1.01 | 1.02 |
| | BHP | 1.04 | 1.06 | 1.23 | 1.03 | 1.05 | 1.16 | 1.01 | 1.02 | 1.07 |
| 65 | RPM | 1.01 | 1.02 | 1.06 | 1.01 | 1.01 | 1.04 | 1.00 | 1.01 | 1.02 |
| | BHP | 1.04 | 1.06 | 1.19 | 1.03 | 1.04 | 1.14 | 1.01 | 1.02 | 1.06 |
| 55 | RPM | 1.01 | 1.02 | 1.05 | 1.01 | 1.01 | 1.04 | 1.00 | 1.01 | 1.02 |
| | BHP | 1.03 | 1.05 | 1.16 | 1.02 | 1.03 | 1.12 | 1.01 | 1.02 | 1.05 |
| 45 | RPM | 1.01 | 1.01 | 1.04 | 1.01 | 1.01 | 1.03 | 1.00 | 1.00 | 1.01 |
| | BHP | 1.02 | 1.04 | 1.13 | 1.02 | 1.03 | 1.09 | 1.01 | 1.01 | 1.04 |

Table 6. WOV Factors

| FAN SIZE | WOV FACTOR | D |
|----------|------------|-------|
| 121 | 1.08 | 12.40 |
| 141 | 1.55 | 13.98 |
| 161 | 2.22 | 15.75 |
| 181 | 3.42 | 17.72 |
| 201 | 4.68 | 19.68 |
| 221 | 6.58 | 22.05 |
| 251 | 9.37 | 24.80 |
| 281 | 14.31 | 27.95 |
| 321 | 20.47 | 31.50 |
| 351 | 31.51 | 35.43 |
| 391 | 43.24 | 39.37 |
| 441 | 60.73 | 44.09 |
| 491 | 84.44 | 49.21 |


Table 7. Temperature and Altitude Correction Factors

| AIR TEMP °F | ALTITUDE IN FEET ABOVE SEA LEVEL | | | | | | | | | | | |
|-------------|------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 0 | 1000 | 2000 | 3000 | 4000 | 5000 | 6000 | 7000 | 8000 | 9000 | 10000 | 15000 |
| | BAROMETRIC PRESSURE IN INCHES OF MERCURY | | | | | | | | | | | |
| | 29.92 | 28.86 | 27.82 | 26.82 | 25.84 | 24.90 | 23.98 | 23.09 | 22.22 | 21.39 | 20.58 | 16.89 |
| 70 | 1.000 | 0.964 | 0.930 | 0.896 | 0.864 | 0.832 | 0.801 | 0.772 | 0.743 | 0.714 | 0.688 | 0.564 |
| 100 | 0.946 | 0.912 | 0.880 | 0.848 | 0.818 | 0.787 | 0.758 | 0.730 | 0.703 | 0.676 | 0.651 | 0.534 |
| 150 | 0.869 | 0.838 | 0.808 | 0.770 | 0.751 | 0.723 | 0.696 | 0.671 | 0.646 | 0.620 | 0.598 | 0.490 |
| 200 | 0.803 | 0.774 | 0.747 | 0.720 | 0.694 | 0.668 | 0.643 | 0.620 | 0.596 | 0.573 | 0.552 | 0.453 |
| 250 | 0.747 | 0.720 | 0.694 | 0.669 | 0.645 | 0.622 | 0.598 | 0.576 | 0.555 | 0.533 | 0.514 | 0.421 |
| 300 | 0.697 | 0.672 | 0.648 | 0.624 | 0.604 | 0.580 | 0.558 | 0.538 | 0.518 | 0.498 | 0.480 | 0.393 |
| 400 | 0.616 | 0.594 | 0.573 | 0.552 | 0.532 | 0.513 | 0.493 | 0.476 | 0.458 | 0.440 | 0.424 | 0.347 |
| 500 | 0.552 | 0.532 | 0.513 | 0.495 | 0.477 | 0.459 | 0.442 | 0.426 | 0.410 | 0.394 | 0.380 | 0.311 |
| 600 | 0.500 | 0.482 | 0.469 | 0.448 | 0.432 | 0.416 | 0.400 | 0.386 | 0.372 | 0.352 | 0.344 | 0.282 |
| 700 | 0.457 | 0.441 | 0.425 | 0.410 | 0.395 | 0.380 | 0.366 | 0.353 | 0.340 | 0.326 | 0.315 | 0.258 |
| 800 | 0.420 | 0.404 | 0.389 | 0.375 | 0.362 | 0.350 | 0.336 | 0.323 | 0.311 | 0.300 | 0.290 | 0.237 |
| 900 | 0.389 | 0.376 | 0.363 | 0.349 | 0.336 | 0.324 | 0.312 | 0.300 | 0.289 | 0.279 | 0.268 | 0.220 |
| 1000 | 0.363 | 0.350 | 0.338 | 0.325 | 0.314 | 0.302 | 0.291 | 0.280 | 0.270 | 0.259 | 0.250 | 0.205 |

Table 8. Derating Factors For High Temperature

| TEMP. (°F) | STEEL | | | STAINLESS STEEL | |
|------------|----------|---------|-----------|-----------------|-----------|
| | CLASS II | | CLASS III | CLASS II | CLASS III |
| | 121-281 | 321-491 | | | |
| 70 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| 200 | 0.99 | 0.97 | 0.97 | 1.00 | 0.98 |
| 250 | 0.98 | 0.96 | 0.96 | 1.00 | 0.96 |
| 300 | 0.97 | 0.95 | 0.95 | 1.00 | 0.94 |
| 400 | 0.96 | 0.93 | 0.93 | 1.00 | 0.91 |
| 500 | 0.93 | 0.90 | 0.90 | 0.97 | 0.87 |
| 600 | 0.90 | 0.87 | 0.87 | 0.94 | 0.84 |
| 700 | 0.88 | 0.84 | 0.84 | 0.90 | 0.80 |
| 800 | 0.83 | 0.81 | 0.81 | 0.87 | 0.78 |
| 1000 | N/A | N/A | N/A | 0.81 | 0.75 |

When operating fans at elevated temperatures, the maximum RPMs of the fan from Table 1 on page 10 must be corrected to the safe operating RPM limit for the application using the factors listed in the Table 8.

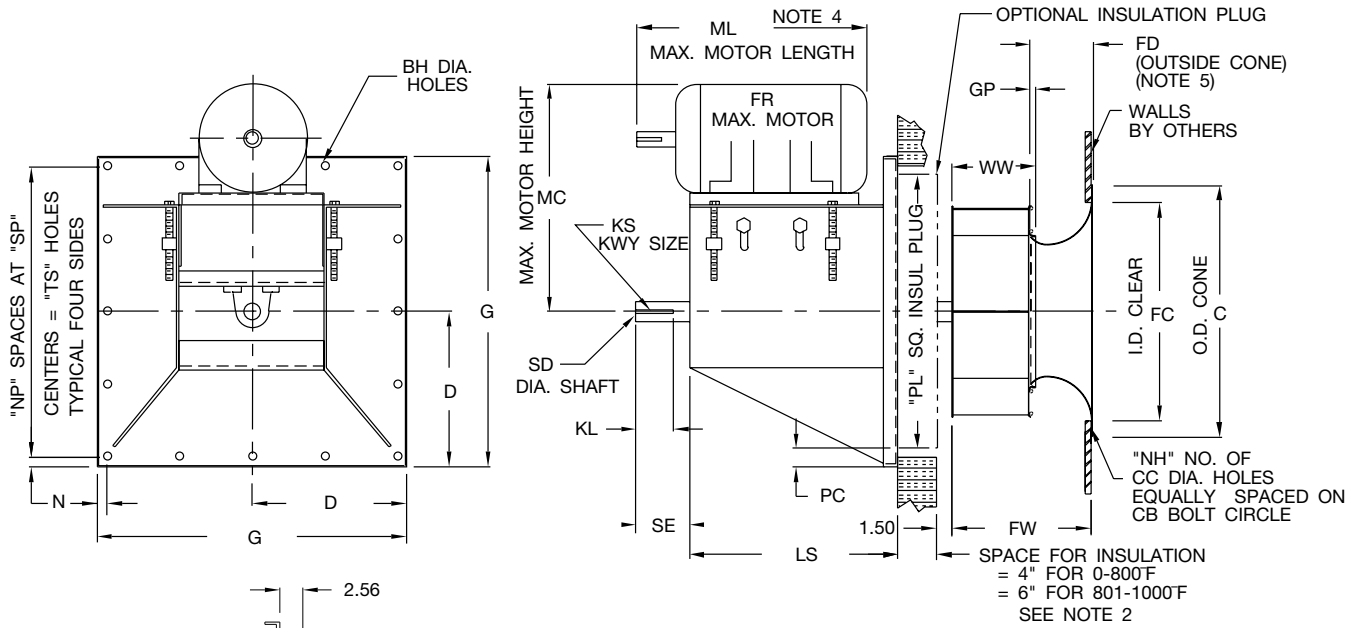

NOTES:

1. Dimensions apply to unhooused assembly only.
2. When specified, the shaft length can be extended an additional 2" for 6" of insulation, for operation to 800°F, without changes to the shaft diameter. See Detail "A" for shaft cooler recess cone and shaft seal on fans over 300°F with 4" or larger insulation plug.
3. CW rotation is standard. CCW rotation is optional.
4. To ensure selected motor will fit standard assembly, compare the maximum motor length, dimension "ML," to overall motor length.
5. Dimensions are subject to change based on accessories. See page 14 for accessory options.
6. Dimensions shown are in inches unless otherwise indicated.


| SIZE | BH | C | CB | CC | D | FC | FD | FW | G | GP | KL | KS | LS |
|------|------|-------|-------|------|-------|-------|-------|-------|-------|------|------|---------|-------|
| 121 | 0.56 | 17.13 | 15.88 | 0.69 | 11.38 | 13.75 | 3.72 | 8.48 | 22.75 | 0.25 | 4.00 | .38x.19 | 17.50 |
| 141 | 0.56 | 18.91 | 17.63 | 0.69 | 11.38 | 15.50 | 4.19 | 9.55 | 22.75 | 0.25 | 4.00 | .38x.19 | 18.50 |
| 161 | 0.56 | 20.88 | 19.59 | 0.88 | 14.81 | 17.75 | 4.72 | 10.75 | 29.63 | 0.25 | 4.00 | .38x.19 | 18.50 |
| 181 | 0.56 | 22.84 | 21.56 | 0.88 | 14.81 | 20.00 | 5.31 | 12.16 | 29.63 | 0.31 | 4.50 | .50x.25 | 21.00 |
| 201 | 0.56 | 25.19 | 23.94 | 0.88 | 14.81 | 22.00 | 5.88 | 13.39 | 29.63 | 0.31 | 4.50 | .50x.25 | 21.00 |
| 221 | 0.56 | 27.97 | 26.69 | 0.88 | 16.00 | 24.50 | 6.59 | 15.01 | 32.00 | 0.31 | 4.50 | .50x.25 | 22.50 |
| 251 | 0.56 | 31.13 | 29.84 | 1.00 | 16.00 | 27.50 | 7.44 | 16.93 | 32.00 | 0.50 | 4.50 | .50x.25 | 22.50 |
| 281 | 0.69 | 34.66 | 33.38 | 1.00 | 18.31 | 30.75 | 8.38 | 19.06 | 36.63 | 0.50 | 5.00 | .50x.25 | 23.00 |
| 321 | 0.69 | 39.59 | 37.84 | 1.00 | 21.81 | 35.00 | 9.44 | 21.40 | 43.63 | 0.56 | 5.00 | .50x.25 | 24.50 |
| 351 | 0.69 | 43.53 | 41.78 | 1.00 | 21.81 | 39.25 | 10.63 | 24.08 | 43.63 | 0.63 | 5.50 | .63x.31 | 24.50 |
| 391 | 0.69 | 48.31 | 46.53 | 1.00 | 27.50 | 43.50 | 11.75 | 26.77 | 55.00 | 0.63 | 5.50 | .63x.31 | 27.50 |
| 441 | 0.69 | 53.41 | 51.66 | 1.00 | 27.50 | 48.50 | 13.19 | 29.96 | 55.00 | 0.75 | 5.50 | .63x.31 | 27.50 |
| 491 | 0.69 | 59.31 | 57.56 | 1.00 | 28.50 | 54.25 | 14.63 | 33.40 | 57.00 | 0.78 | 5.50 | .63x.31 | 27.50 |

| SIZE | MC | ML | N | NH | NP | PC | PL | SD | SE | SP | TS | WW | MAX. MTR. FRAME |
|------|-------|-------|------|-------|------|------|-------|-------|------|------|-------|-------|-----------------|
| 121 | 24.75 | 19.13 | 1.00 | 8.00 | 4.00 | 1.75 | 19.25 | 1.687 | 5.00 | 5.19 | 20.75 | 5.07 | 213T |
| 141 | 26.25 | 20.13 | 1.00 | 8.00 | 4.00 | 1.75 | 19.25 | 1.687 | 5.00 | 5.19 | 20.75 | 5.67 | 215T |
| 161 | 26.25 | 20.13 | 1.00 | 8.00 | 4.00 | 1.81 | 26.00 | 1.687 | 5.00 | 6.91 | 27.63 | 6.34 | 215T |
| 181 | 29.50 | 24.13 | 1.00 | 16.00 | 4.00 | 1.81 | 26.00 | 1.937 | 5.50 | 6.91 | 27.63 | 7.24 | 254T |
| 201 | 29.50 | 24.13 | 1.00 | 16.00 | 4.00 | 1.81 | 26.00 | 1.937 | 5.50 | 6.91 | 27.63 | 7.90 | 254T |
| 221 | 29.50 | 25.50 | 1.00 | 16.00 | 4.00 | 1.88 | 28.25 | 1.937 | 5.50 | 7.50 | 30.00 | 8.80 | 256T |
| 251 | 29.50 | 25.50 | 1.00 | 16.00 | 4.00 | 1.88 | 28.25 | 1.937 | 5.50 | 7.50 | 30.00 | 10.06 | 256T |
| 281 | 31.50 | 26.63 | 1.00 | 16.00 | 6.00 | 2.25 | 32.13 | 2.187 | 6.00 | 5.77 | 34.63 | 11.25 | 284T |
| 321 | 33.50 | 28.13 | 1.00 | 16.00 | 6.00 | 2.38 | 38.88 | 2.187 | 6.00 | 6.94 | 41.63 | 12.63 | 286T |
| 351 | 33.50 | 28.13 | 1.00 | 16.00 | 6.00 | 2.38 | 38.88 | 2.437 | 6.50 | 6.94 | 41.63 | 14.19 | 286T |
| 391 | 34.00 | 31.25 | 1.00 | 24.00 | 6.00 | 3.38 | 48.25 | 2.437 | 6.50 | 8.83 | 53.00 | 15.75 | 326T |
| 441 | 36.00 | 31.25 | 1.00 | 24.00 | 6.00 | 3.38 | 48.25 | 2.687 | 6.50 | 8.83 | 53.00 | 17.63 | 326T |
| 491 | 36.00 | 31.25 | 1.00 | 24.00 | 6.00 | 2.50 | 52.00 | 2.687 | 6.50 | 9.17 | 55.00 | 19.66 | 326T |

Dimensions are not to be used for construction. Certified drawings are available upon request.

R-1004964A

Class III

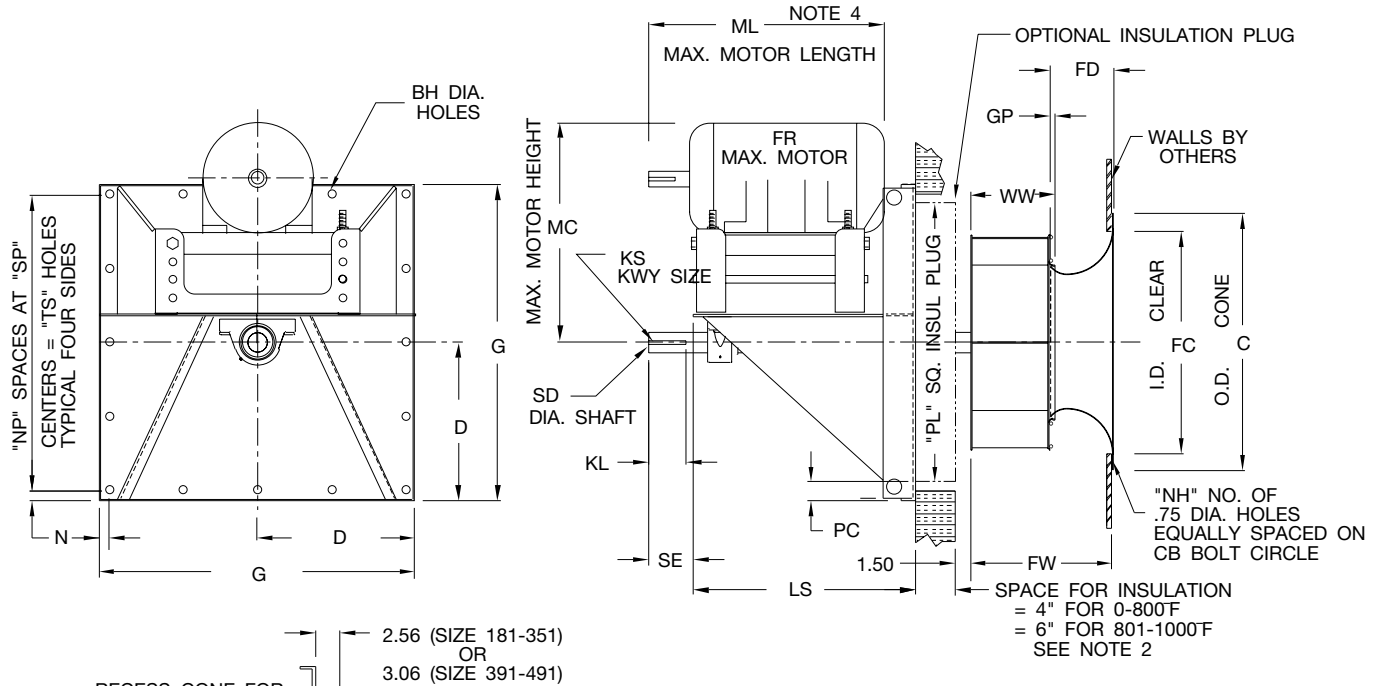

NOTES:


1. Dimensions apply to unboxed assembly only.
2. When specified, the shaft length can be extended an additional 2" for 6" of insulation, for operation to 800°F, without changes to the shaft diameter. See Detail 'A' for details of recess cone for shaft cooler and shaft seal on fans over 300°F with 4" or larger insulation plug.
3. CW rotation is standard. CCW rotation is optional.
4. To ensure selected motor will fit standard assembly, compare the maximum motor length, dimension "ML," to overall motor length.
5. Dimensions are subject to change based on accessories. See page 14 for accessory options.
6. Dimensions shown are in inches unless otherwise indicated.

| SIZE | BH | C | CB | CC | D | FC | FD | FW | G | GP | KL | KS | LS |
|------|------|-------|-------|------|-------|-------|-------|-------|-------|------|------|---------|-------|
| 181 | 0.56 | 22.84 | 21.56 | 0.88 | 14.81 | 20.00 | 5.31 | 12.24 | 29.63 | 0.31 | 4.50 | .63x.31 | 25.00 |
| 201 | 0.56 | 25.19 | 23.94 | 0.88 | 14.81 | 22.00 | 5.88 | 13.46 | 29.63 | 0.31 | 5.50 | .63x.31 | 27.50 |
| 221 | 0.56 | 27.97 | 26.69 | 0.88 | 16.00 | 24.50 | 6.59 | 15.08 | 32.00 | 0.31 | 5.50 | .63x.31 | 27.50 |
| 251 | 0.56 | 31.13 | 29.84 | 1.00 | 16.00 | 27.50 | 7.44 | 16.93 | 32.00 | 0.50 | 6.00 | .63x.31 | 30.50 |
| 281 | 0.69 | 34.66 | 33.38 | 1.00 | 18.31 | 30.75 | 8.38 | 19.12 | 36.63 | 0.50 | 6.00 | .63x.31 | 30.63 |
| 321 | 0.69 | 39.59 | 37.84 | 1.00 | 21.81 | 35.00 | 9.44 | 21.46 | 43.63 | 0.56 | 6.50 | .63x.31 | 32.38 |
| 351 | 0.69 | 43.53 | 41.78 | 1.00 | 21.81 | 39.25 | 10.63 | 24.15 | 43.63 | 0.63 | 8.00 | .63x.31 | 37.88 |
| 391 | 0.69 | 48.31 | 46.53 | 1.00 | 27.50 | 43.50 | 11.75 | 26.83 | 55.00 | 0.63 | 8.00 | .75x.38 | 38.38 |
| 441 | 0.69 | 53.41 | 51.66 | 1.00 | 27.50 | 48.50 | 13.19 | 30.09 | 55.00 | 0.75 | 8.00 | .88x.44 | 38.38 |
| 491 | 0.69 | 59.31 | 57.56 | 1.00 | 28.50 | 54.25 | 14.63 | 33.46 | 57.00 | 0.78 | 8.00 | .88x.44 | 38.38 |

| SIZE | MC | ML | N | NH | NP | PC | PL | SD | SE | SP | TS | WW | MAX. MTR. FRAME |
|------|-------|-------|------|-------|------|------|-------|-------|------|------|-------|-------|-----------------|
| 181 | 26.50 | 25.75 | 1.00 | 16.00 | 4.00 | 1.81 | 26.00 | 2.687 | 4.50 | 6.91 | 27.63 | 7.31 | 256T |
| 201 | 28.00 | 28.88 | 1.00 | 16.00 | 4.00 | 1.81 | 26.00 | 2.687 | 5.50 | 6.91 | 27.63 | 7.97 | 284T |
| 221 | 28.00 | 28.88 | 1.00 | 16.00 | 4.00 | 1.88 | 28.25 | 2.687 | 5.50 | 7.50 | 30.00 | 8.88 | 286T |
| 251 | 32.00 | 32.00 | 1.00 | 16.00 | 4.00 | 1.88 | 28.25 | 2.687 | 6.00 | 7.50 | 30.00 | 10.06 | 324T |
| 281 | 32.00 | 32.00 | 1.00 | 16.00 | 6.00 | 2.25 | 32.13 | 2.687 | 6.00 | 5.77 | 34.63 | 11.31 | 326T |
| 321 | 34.00 | 34.38 | 1.00 | 16.00 | 6.00 | 2.38 | 38.88 | 2.687 | 6.50 | 6.94 | 41.63 | 12.69 | 365T |
| 351 | 38.00 | 41.25 | 1.00 | 16.00 | 6.00 | 2.38 | 38.88 | 2.687 | 8.00 | 6.94 | 41.63 | 14.25 | 405T |
| 391 | 38.00 | 41.25 | 1.00 | 24.00 | 6.00 | 3.38 | 48.25 | 2.937 | 8.00 | 8.83 | 53.00 | 15.81 | 405T |
| 441 | 38.00 | 41.25 | 1.00 | 24.00 | 6.00 | 3.38 | 48.25 | 3.437 | 8.00 | 8.83 | 53.00 | 17.75 | 405T |
| 491 | 38.00 | 41.25 | 1.00 | 24.00 | 6.00 | 2.50 | 52.00 | 3.437 | 8.00 | 9.17 | 55.00 | 19.72 | 405T |

R-1004965A

Dimensions are not to be used for construction. Certified drawings are available upon request.

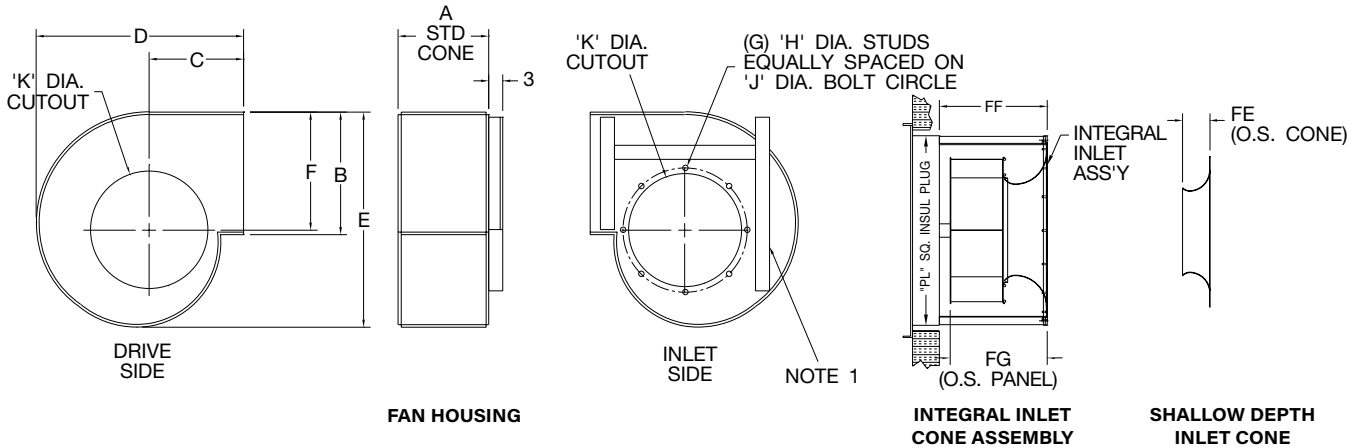

NOTES:

1. Inlet side frame angle on sizes 391, 441 and 491 only.
2. Dimensions shown are in inches unless otherwise indicated.

| SIZE | A | B | C | D | E | F | G | H |
|------|-------|-------|-------|-------|-------|-------|----|--------|
| 121 | 10.00 | 13.81 | 12.56 | 25.13 | 23.69 | 13.19 | 8 | 3/8-16 |
| 141 | 11.00 | 15.63 | 13.69 | 27.88 | 26.69 | 14.88 | 8 | 3/8-16 |
| 161 | 12.19 | 17.56 | 14.81 | 30.81 | 30.00 | 16.75 | 8 | 3/8-16 |
| 181 | 13.63 | 19.75 | 16.13 | 34.13 | 33.75 | 18.81 | 16 | 3/8-16 |
| 201 | 14.88 | 22.00 | 17.50 | 37.50 | 37.50 | 20.88 | 16 | 3/8-16 |
| 221 | 16.44 | 24.69 | 19.00 | 41.38 | 42.06 | 23.44 | 16 | 3/8-16 |
| 251 | 18.38 | 27.75 | 20.81 | 45.94 | 47.25 | 26.31 | 16 | 3/8-16 |
| 281 | 20.44 | 31.25 | 23.94 | 52.25 | 53.25 | 29.63 | 16 | 3/8-16 |
| 321 | 22.81 | 35.19 | 26.44 | 58.38 | 59.88 | 33.38 | 16 | 3/8-16 |
| 351 | 25.50 | 39.56 | 29.44 | 65.31 | 67.38 | 37.50 | 16 | 3/8-16 |
| 391 | 28.13 | 43.94 | 29.56 | 69.44 | 74.88 | 41.69 | 24 | 1/2-13 |
| 441 | 31.25 | 49.25 | 32.63 | 77.25 | 83.88 | 46.69 | 24 | 1/2-13 |
| 491 | 34.69 | 54.94 | 35.88 | 85.69 | 93.50 | 52.06 | 24 | 1/2-13 |

| SIZE | J | K | FE | | FF | | FG | |
|------|-------|-------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|
| | | | STANDARD INLET CONE | SHALLOW INLET CONE | STANDARD INLET CONE | SHALLOW INLET CONE | STANDARD INLET CONE | SHALLOW INLET CONE |
| 121 | 15.88 | 14.13 | 3.75 | — | 10.19 | — | 8.69 | — |
| 141 | 17.63 | 15.94 | 4.19 | — | 11.19 | — | 9.69 | — |
| 161 | 19.59 | 17.88 | 4.75 | 3.44 | 12.38 | 11.06 | 10.88 | 9.56 |
| 181 | 21.56 | 19.88 | 5.31 | 3.75 | 13.81 | 12.25 | 12.31 | 10.75 |
| 201 | 23.94 | 22.19 | 5.88 | 4.13 | 15.06 | 13.31 | 13.56 | 11.81 |
| 221 | 26.69 | 25.00 | 6.63 | 4.50 | 16.63 | 14.56 | 15.13 | 13.06 |
| 251 | 29.84 | 28.13 | 7.44 | 4.88 | 18.56 | 15.94 | 17.06 | 14.44 |
| 281 | 33.38 | 31.69 | 8.38 | 5.19 | 20.63 | 17.44 | 19.13 | 15.94 |
| 321 | 37.84 | 35.63 | 9.44 | 5.50 | 23.06 | 19.13 | 21.56 | 17.63 |
| 351 | 41.78 | 39.56 | 10.63 | 6.50 | 25.69 | 21.56 | 24.19 | 20.06 |
| 391 | 46.53 | 44.31 | 11.75 | 7.25 | 28.38 | 23.88 | 26.88 | 22.38 |
| 441 | 51.66 | 49.44 | 13.19 | 8.25 | 31.44 | 26.50 | 29.94 | 25.00 |
| 491 | 57.56 | 55.31 | 14.63 | 9.25 | 34.94 | 29.56 | 33.44 | 28.06 |

R-1004966

Dimensions are not to be used for construction. Certified drawings are available upon request.



| MOTOR FRAME SIZE | CLASS II | | | | | | | | CLASS III | | | | | | | | | | | |
|------------------------|----------|------|---------|------|---------|------|---------|------|-----------|------|---------|------|---------|------|------|------|---------|------|---------|------|
| | 121-161 | | 181-251 | | 281-351 | | 391-491 | | 181 | | 201-221 | | 251-281 | | 321 | | 351-391 | | 441-491 | |
| | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX |
| 56 | 13 | 16.5 | 14 | 17.5 | 14.5 | 18 | 16 | 19.5 | 9.4 | 13.4 | 9.4 | 13.4 | 9.3 | 13.3 | 9.3 | 13.3 | 9.3 | 13.3 | 9.8 | 13.8 |
| 143-145 | 13 | 16.5 | 14 | 17.5 | 14.5 | 18 | 16 | 19.5 | 9.4 | 13.4 | 9.4 | 13.4 | 9.3 | 13.3 | 9.3 | 13.3 | 9.3 | 13.3 | 9.8 | 13.8 |
| 182-184 | 14 | 17.5 | 15 | 18.5 | 15.5 | 19 | 17 | 20.5 | 10.4 | 14.4 | 10.4 | 14.4 | 10.3 | 14.3 | 10.3 | 14.3 | 10.3 | 14.3 | 10.8 | 14.8 |
| 213-215 | 14.8 | 18.3 | 15.8 | 19.3 | 16.3 | 19.8 | 17.8 | 21.3 | 11.2 | 15.2 | 11.2 | 15.2 | 11 | 15 | 11.1 | 15.1 | 11.1 | 15.1 | 11.6 | 15.6 |
| 254-256 | — | — | 16.8 | 20.3 | 17.3 | 20.8 | 18.8 | 22.3 | 14.8 | 18.8 | 14.8 | 18.8 | 14.6 | 18.6 | 14.7 | 18.7 | 14.7 | 18.7 | 15.2 | 19.2 |
| 284-286 | — | — | — | — | 18.0 | 21.5 | 19.5 | 23 | — | — | 15.6 | 19.6 | 15.4 | 19.4 | 15.4 | 19.4 | 15.4 | 19.4 | 15.9 | 19.9 |
| 324-326 | — | — | — | — | — | — | 20.5 | 24 | — | — | — | — | 17.6 | 22.6 | 17.6 | 22.6 | 17.6 | 22.6 | 18.1 | 23.1 |
| 364-365 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 18.6 | 23.6 | 18.6 | 23.6 | 19.1 | 24.1 |
| 404-405 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 20.8 | 25.8 | 21.3 | 26.3 |



Baking Oven Application



Model CPG

Fans shall be Model CPG Single Thickness Airfoil, as manufactured by Aerovent, Minneapolis, Minnesota.

PERFORMANCE — Fans shall be tested and rated in accordance with industry accepted test codes and shall be guaranteed by the manufacturer to deliver rated published performance levels.

PLUG PANEL — Plug panel shall be constructed of steel with formed flanges to maintain flatness and rigidity. Panel shall be prepunched for bolt mounting. The "Cross Frame" bearing support shall be designed for maximum stability and load spreading. Bearings shall be serviceable without disassembly of panel or frame. Plug assembly is available for both horizontal and vertical application. Horizontal construction is standard. Vertical construction must be specified.

IMPELLER — CPG impellers shall be backward curved, non-overloading, single thickness airfoil type, designed for maximum efficiency and quiet operation. Impellers shall be constructed of heavy-gauge steel, with blades welded to a flat impeller cone and back plate.

SHAFT — Shafts shall be AISI 1040 or 1045 hot rolled steel accurately turned, ground, polished and ring gauged for accuracy. Shafts shall be sized for a first critical speed of at least 1.43 times the maximum speed for the class.

BEARINGS — Bearings shall be either ball or spherical roller, heavy-duty, self-aligning, pillow block type. Bearing selection is based upon L-10 minimum life of 40,000 hours or L-50 minimum life of 200,000 hours.

OPTIONAL ALL WELDED HOUSING — Housing shall be of heavy-gauge steel. Housing shall be provided with impeller opening on each side and weld studs on inlet side for cone mounting. Specify rotation and discharge as viewed from drive side to ensure proper stud placement. Housing supports and attachments for wall mounting to be provided by others.


ADJUSTABLE MOTOR BASE — Adjustable motor base is standard in Arrangement 9 and shall have a four point leveling and tension adjustment to ensure proper drive belt alignment. The motor base shall be heavy-gauge steel and prepunched to accept standard motor frame specified.

OPTIONAL INLET VANES — Inlet vane blades are cantilever design or with centered supports equipped with permanently lubricated needle bearings and ball joints for smooth and easy operation. Vane assemblies are external type for sizes 121 through 161 and nested for sizes 181 through 491. Standard inlet vanes are applicable to 300°F. Consult factory for higher temperatures.

FACTORY RUN TEST — All fans prior to shipment shall be completely assembled and test run as a unit at the specified operating speed or maximum RPM allowed for the particular construction type. Each impeller shall be statically and dynamically balanced in accordance with ANSI/AMCA 204 "Balance Quality and Vibration Levels for Fans" to Fan Application Category BV-3, Balance Quality Grade G6.3. Balance readings shall be taken by electronic type equipment in the axial, vertical and horizontal directions on each of the bearings. Records shall be maintained and a written copy shall be available upon request.



WALL MOUNTED FANS | TUBEAXIAL & VANEAXIAL FANS | CENTRIFUGAL FANS & BLOWERS
ROOF VENTILATORS | AIR HEATERS & COOLERS | AIR MAKE-UP | FIBERGLASS FANS | CUSTOM FANS

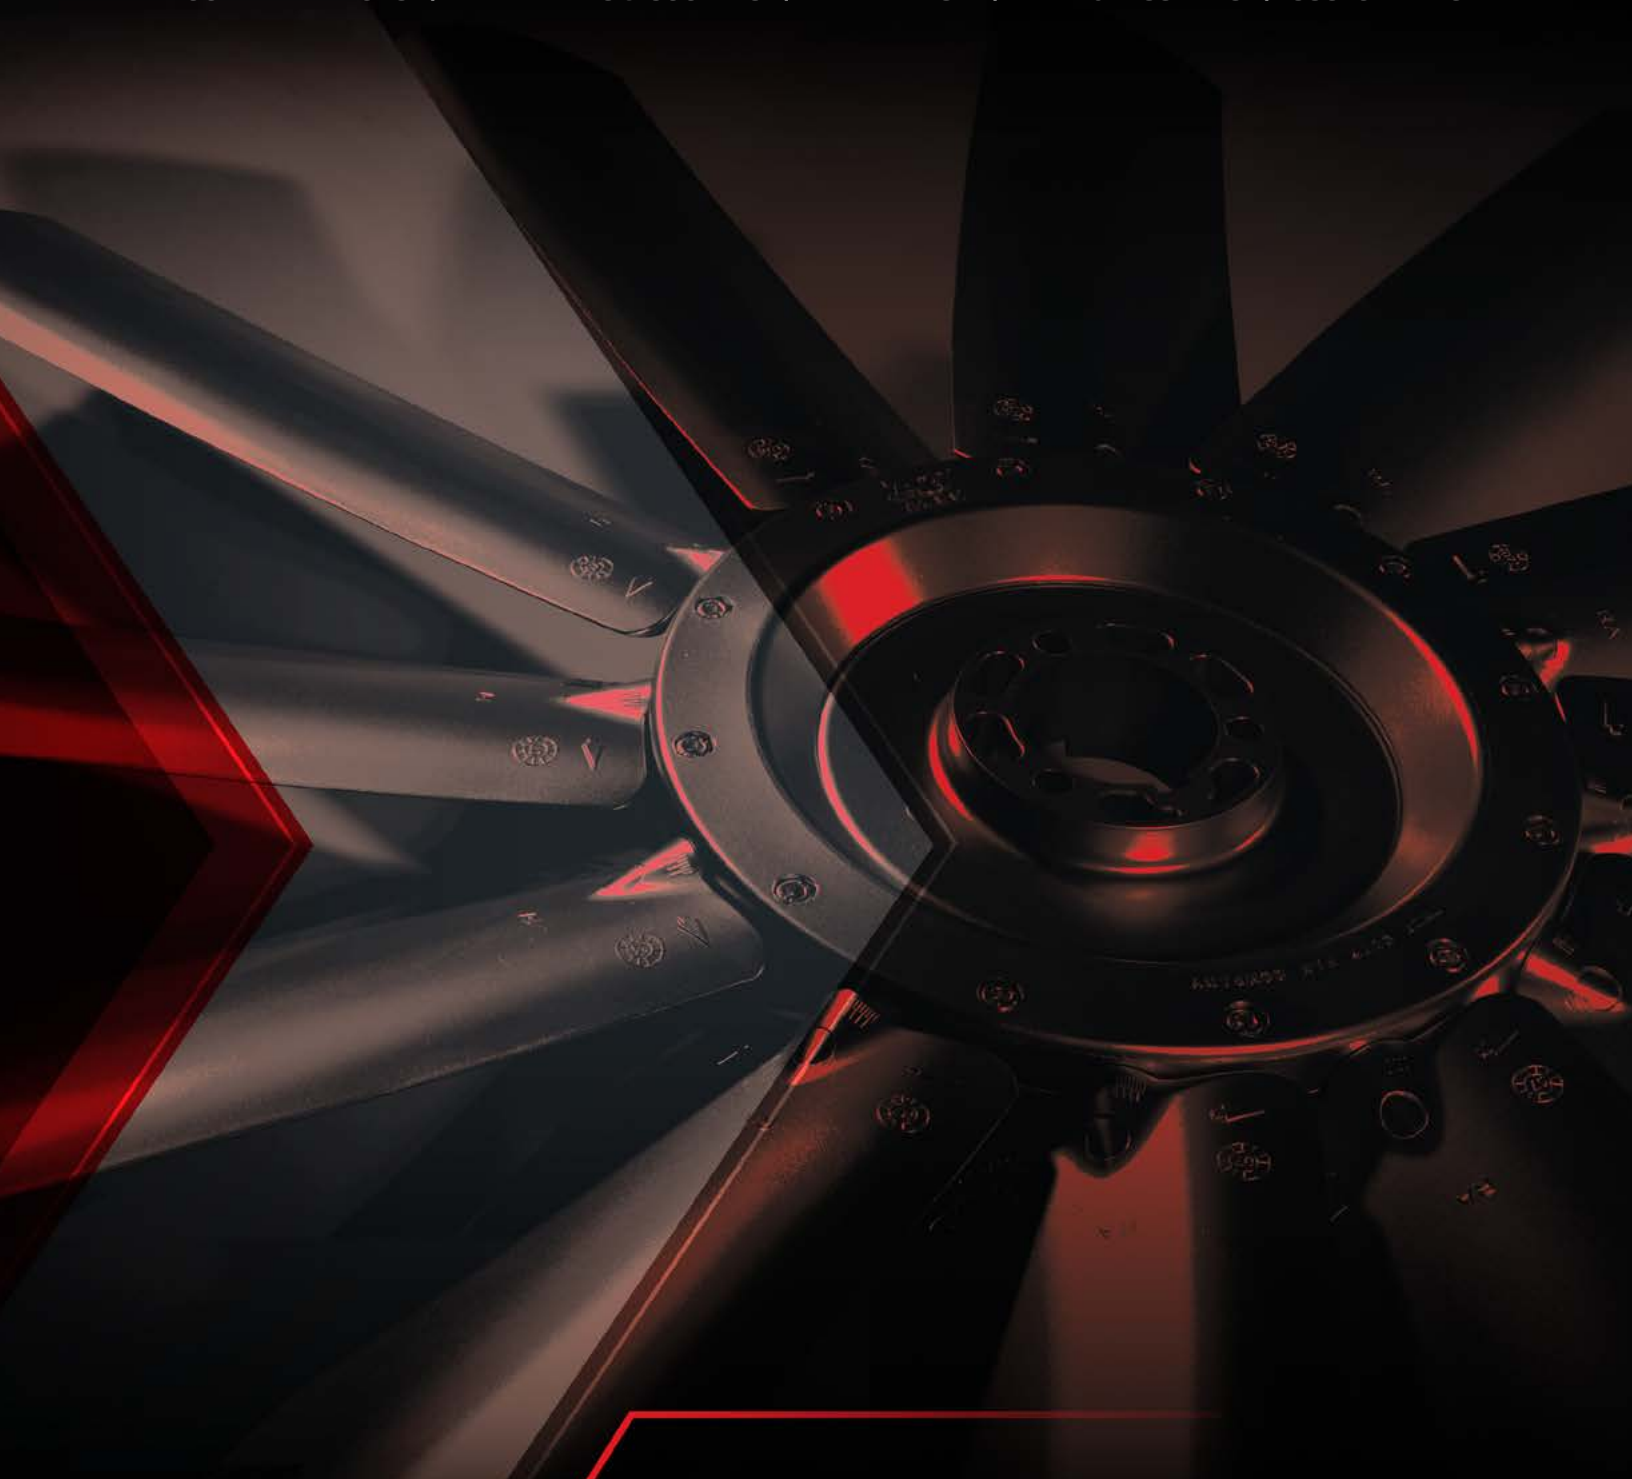

AEROVENT 
INDUSTRIAL VENTILATION SYSTEMS

AEROVENT.COM

5959 Trenton Lane N. | Minneapolis, MN 55442 | Phone: 763-551-7500 | Fax: 763-551-7501

©2013-2024 Aerovent, Minneapolis, MN. All rights reserved. Catalog illustrations cover the general appearance of Aerovent products at the time of publication and we reserve the right to make changes in design and construction at any time without notice.